

MR Range of Mounting Head Ties

Features and Benefits


A one piece bundling and fixing tie offering quick and easy installation.

Application

This range of one piece cable ties has a mounting hole fixing method. Once fastened around the cables the bundle can be simply secured to the panel with a screw or bolt.

Ideal for fixing cables, pipes and hoses onto solid surfaces with pre-drilled holes or holes in metal plates.


These ties are used in many industries e.g. building construction, panel builders and white goods manufacturers.

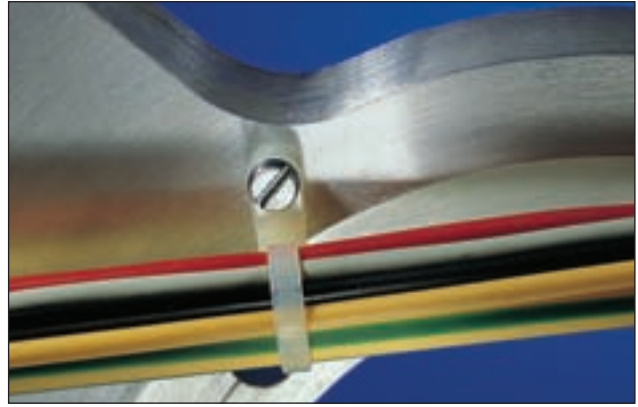

The mounting head ties can be easily screwed onto a panel.

Material Data

RoHS	Material	Polyamide 6.6 UV Resistant (PA66W)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)
	Flammability	UL94 V2
	HF (halogenfree)	



Material Data

RoHS	Material	Polyamide 6.6 (PA66)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)
	Flammability	UL94 V2
	HF (halogenfree)	

Material Data

RoHS	Material	Polyamide 6.6 Heat Stabilised (PA66HS)
	Colour	Natural (NT), Black (BK)
	Operating Temperature	-40°C to +105°C Continuous, (+145°C for 500 h)
	Flammability	UL94 V2
HF (halogenfree)		

Technical Table

Code	Length (L)	Width (W)	Bundle Ø max.	Min. Tensile Strength (N)	Hole Ø	Material	Colour	Application Tool
T18MR	110	2.5	20	80	3.1	PA66	Black (BK)	1-3, 5
T18MR	110	2.5	20	80	3.1	PA66	Natural (NT)	1-3, 5
T18MR	110	2.5	20	80	3.1	PA66HS	Natural (NT)	1-3, 5
T30MR	160	3.5	32	135	4.3	PA66	Black (BK)	1-3, 5
T30MR	160	3.5	32	135	4.3	PA66	Natural (NT)	1-3, 5
T30MR	160	3.5	32	135	4.3	PA66W	Black (BK)	1-3, 5
T50MR	215	4.6	45	225	5.4	PA66	Natural (NT)	1-10
T50MR	215	4.6	45	225	5.4	PA66W	Black (BK)	1-10
T50MR	215	4.6	45	225	5.4	PA66	Black (BK)	1-10
T50MS	165	4.6	32	225	5.3	PA66	Natural (NT)	1-10
T50MS	165	4.6	32	225	5.3	PA66	Black (BK)	1-10
T50ML	390	4.6	100	225	5.5	PA66	Natural (NT)	1-10
T50ML	390	4.6	100	225	5.5	PA66	Black (BK)	1-10
T120MR(E)	395	7.6	102	535	6.5	PA66	Black (BK)	6-10
T120MR(E)	395	7.6	102	535	6.5	PA66W	Black (BK)	6-10
T120MR(E)	395	7.6	102	535	6.5	PA66W	Natural (NT)	6-10

All dimensions in mm. Subject to technical changes.

For more information on Application Tools please refer to Page 2/10.



Please Note for Product Specific Approvals please refer to Appendix.