

CTC Convoluted Tubing Clamp

Features and Benefits


The clamps for corrugated tubing are available in various nominal diameters and have a base in the shape of a fir tree for inserting in a drilled hole. Due to the individual fins, the clamp can be inserted into blind holes with threading. The corrugated tubing is snapped into the clamp where it is securely held. The rib on the inside of the bracket fits into the profile of the tubing and prevents the tubing from slipping.

Application

CTC clamps are used for example in the automobile, harness making, electrical industry and wherever corrugated tubing has to be quickly and firmly fixed.



The tubing is clicked into the CTC clamp and is held firmly.

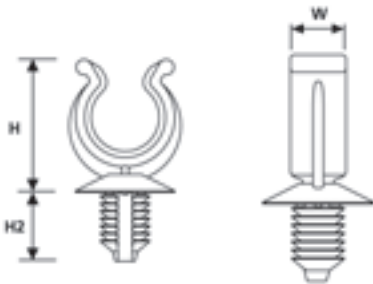

CTC10FT6LG

Material Data

RoHS	Material	Polyamide 6.6 High Impact Modified, Heat Stabilised (PA66HIRHS)
	Colour	Black (BK)
	Operating Temperature	-40°C to +105°C
	Flammability	UL94 HB

Technical Table

Code	Width (W)	Height (H)	Height (H2)	Normal Ø	Disc Ø	Fixing Hole Ø (FH)	Panel Thickness min.	Panel Thickness max.	For Convoluted Tubing
CTC4.5FT6LG	8.0	16.1	11.1	4.5	16.0	6.5-7.0	0.75	6.0	IWS 4,5
CTC7.5FT6LG	8.0	18.6	11.1	7.5	16.0	6.5-7.0	0.75	6.0	IWS 7,5-8,5
CTC7.5FT9	8.0	19.9	12.2	7.5	23.0	8.7-9.0	3.0	5.0	IWS 7,5-8,5
CTC10FT6	8.0	21.4	7.5	10.0	16.0	6.5-7.0	0.75	3.0	IWS 8,5-13
CTC10FT6LG	8.0	21.4	11.1	10.0	16.0	6.5-7.0	0.75	6.0	IWS 8,5-13
CTC10FT9	8.0	22.7	12.2	10.0	23.0	8.7-9.0	3.0	5.0	IWS 8,5-13
CTC13FT6	8.0	25.2	7.5	13.0	16.0	6.5-7.0	0.75	3.0	IWS 10-17
CTC13FT6LG	8.0	25.2	11.1	13.0	16.0	6.5-7.0	0.75	6.0	IWS 10-17
CTC22FT9	8.0	37.7	12.2	22.0	23.0	8.7-9.0	3.0	5.0	IWS 19-29

All dimensions in mm. Subject to technical changes.